


TS Series

MTS-3 5

Ứng năng / Schematic Function

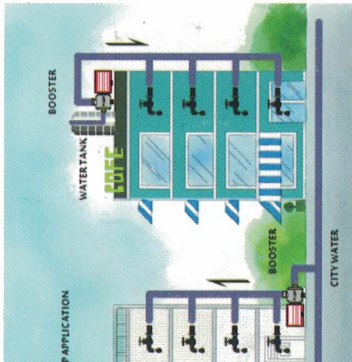

FOR: VIETNAM , TAIWAN


- Liquid temperature: 0~90°C / 32~194°F
- HP range: 1/3~2 HP / 0.25~1.5KW
- PH value: 6~8
- Rated speed: 2900 / 3450rpm
- IP class: IP55
- Max. suction: 1M

xác nhận / Certification





Tính năng / Features

- 1, clean water
- Liquids come into contact with parts are stainless steel
- 2, low noise
- Design of a new cooling fan, reducing wind shear operation more mute
- 3, motor protection rating: IP55
- Higher level of protection, suitable for outdoor
- 4, high quality mechanical shaft seal is resistant to temperature of 90 ° C

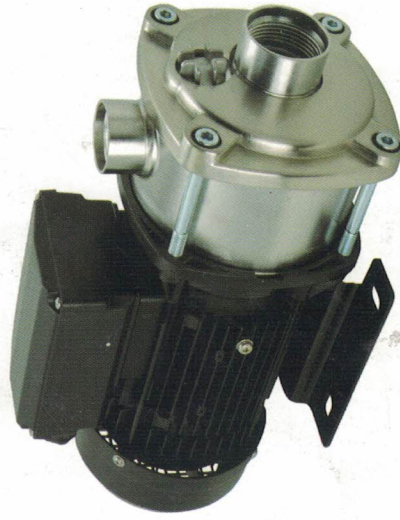

Đường cong / Curve

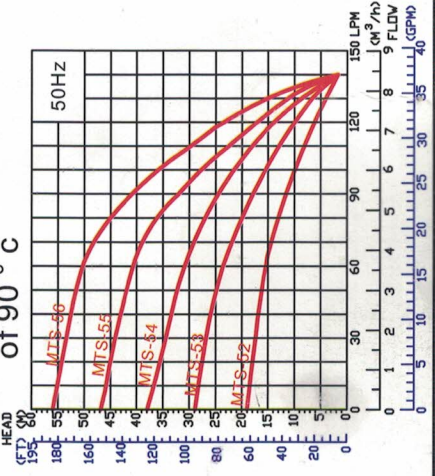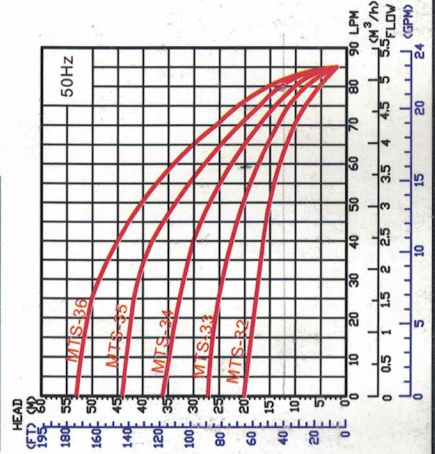

Ứng dụng / Applications


- Household pumping and pressure systems
- Frequency conversion constant pressure systems
- Garden sprinkler irrigation, sprinkler system
- Circulating water system of air conditioning
- Filter systems

Đặc điểm kỹ thuật / Specification


Model No.	Output		Inlet		Outlet		Max Flow (LPM)	LPM Flow @ Head					Max Head (M)	Weight Kg
	HP	W	mm	inch	mm	inch		5M	10M	15M	20M	25M		
MTS-32(T)	1/3	250	25	1"	25	1"	85	80	70	50	-	-	20	7.4
MTS-33(T)	1/2	400	25	1"	25	1"	85	83	75	65	50	25	27	7.5
Model No.	Output		Inlet		Outlet		Max Flow (LPM)	LPM Flow @ Head					Max Head (M)	Weight Kg
	HP	W	mm	inch	mm	inch		10M	20M	30M	40M	50M		
MTS-34(T)	3/4	550	25	1"	25	1"	85	80	65	40	-	-	36	10
MTS-35(T)	1	750	25	1"	25	1"	85	82	70	55	35	-	44	10.5
MTS-36(T)	1 1/2	1125	25	1"	25	1"	85	83	75	65	50	25	53	12
Model No.	Output		Inlet		Outlet		Max Flow (LPM)	LPM Flow @ Head					Max Head (M)	Weight Kg
	HP	W	mm	inch	mm	inch		5M	10M	15M	20M	25M		
MTS-52(T)	1/2	400	32	1-1/4"	25	1"	140	125	100	65	-	-	19	8
MTS-53(T)	3/4	550	32	1-1/4"	25	1"	140	135	120	100	80	50	29	10
Model No.	Output		Inlet		Outlet		Max Flow (LPM)	LPM Flow @ Head					Max Head (M)	Weight Kg
	HP	W	mm	inch	mm	inch		10M	20M	30M	40M	50M		
MTS-54(T)	1	750	32	1-1/4"	25	1"	140	130	105	65	-	-	38	11.5
MTS-55(T)	1 1/2	1125	32	1-1/4"	25	1"	140	132	115	95	65	-	47	12.5
MTS-56(T)	2	1500	32	1-1/4"	25	1"	140	135	125	110	92	62	56	15

Kích thước / Dimension

Model	W	W1	W2	H		H1	H2	L	L1	L2	L3
				∅	∅						
MTS-32	158	125	140	187	174	75	90	318	131	96	72
MTS-33	158	125	140	187	174	75	90	318	131	96	72
MTS-34	158	125	140	187	174	75	90	365	149	96	90
MTS-35	158	125	140	187	174	75	90	383	167	96	108
MTS-36	158	125	140	200	188	75	90	416	203	96	144
MTS-52	158	125	140	187	174	75	90	318	131	96	72
MTS-53	158	125	140	187	174	75	90	347	131	96	72
MTS-54	158	125	140	200	188	75	90	362	149	96	90
MTS-55	158	125	140	200	188	75	90	380	167	96	108
MTS-56	178	140	155	224	211	90	90	446	243	125	144

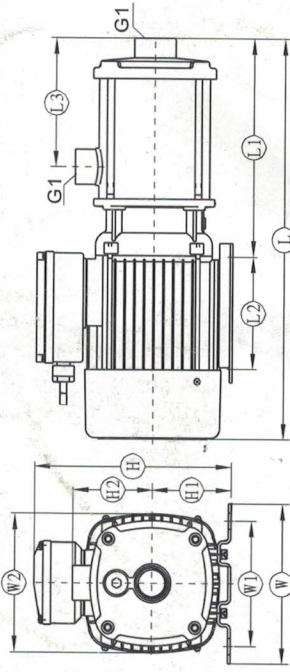

MTS-3 Series

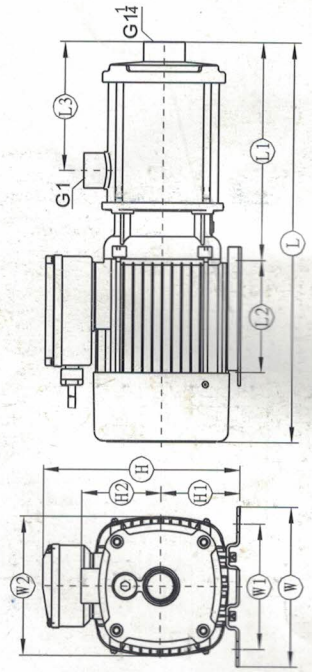

MTS-5 Series