

ShinMaywa

Submersible Pumps

(Channel Impeller) **CNMJ80-MT • CNMJ100-MT**



CNMJ-MT
Series

**New Advanced
Technology!**

Solids passage up to 3-inch,
self-cleaning with chopper

New Advanced Technology!

Improved passing capability, solids passage up to 3-inch (80mm) in diameter.

Semi-open channel impeller has helix-shaped channel and brand-new chopper mechanism.



■ CNMJ-MT Technology

Conventional Pumps

CNWX

(High passing with helix)




CN

(Simple design with semi-open impeller)



CJ

(Chopper)



Combine those **Merit**

CNMJ-MT Brand-New Pumps

■ Improved Passing Capability

Impeller has a helix-shaped passage based on CNWX.

■ Solids Passage up to 3-inch (80mm) in diameter



Impeller provides much greater solids passage diameter than ever before.

■ Simple Design

With single-vane semi-open channel impeller like the CN.

■ Brand-New Chopper Mechanism

CNMJ-MT is equipped with a brand-new chopper mechanism, that is more advanced than CJ.

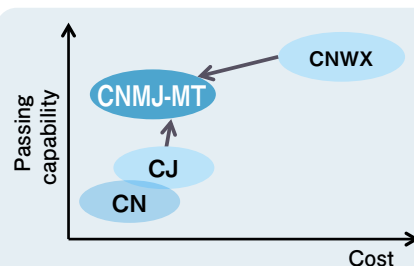


Pass-through Test

	Tennis ball OD66mm	Sanitary items	Plastic bag	Steel can OD53×L105mm	Plastic bottle 500ml
★★★★ = Excellent ★★★ = Very good ★★ = Good ★ = Poor/Normal					
CNWX	★★★★★	★★★★★	★★★★★	★★★★★	★★★★★
CNMJ-MT	★★★★★	★★★★★	★★★★	★★★★★	★★★★★
CN/CJ	★	★★	★★	★	★

✚ Chopper Mechanism

Brand-new chopper mechanism using a chopper plate.

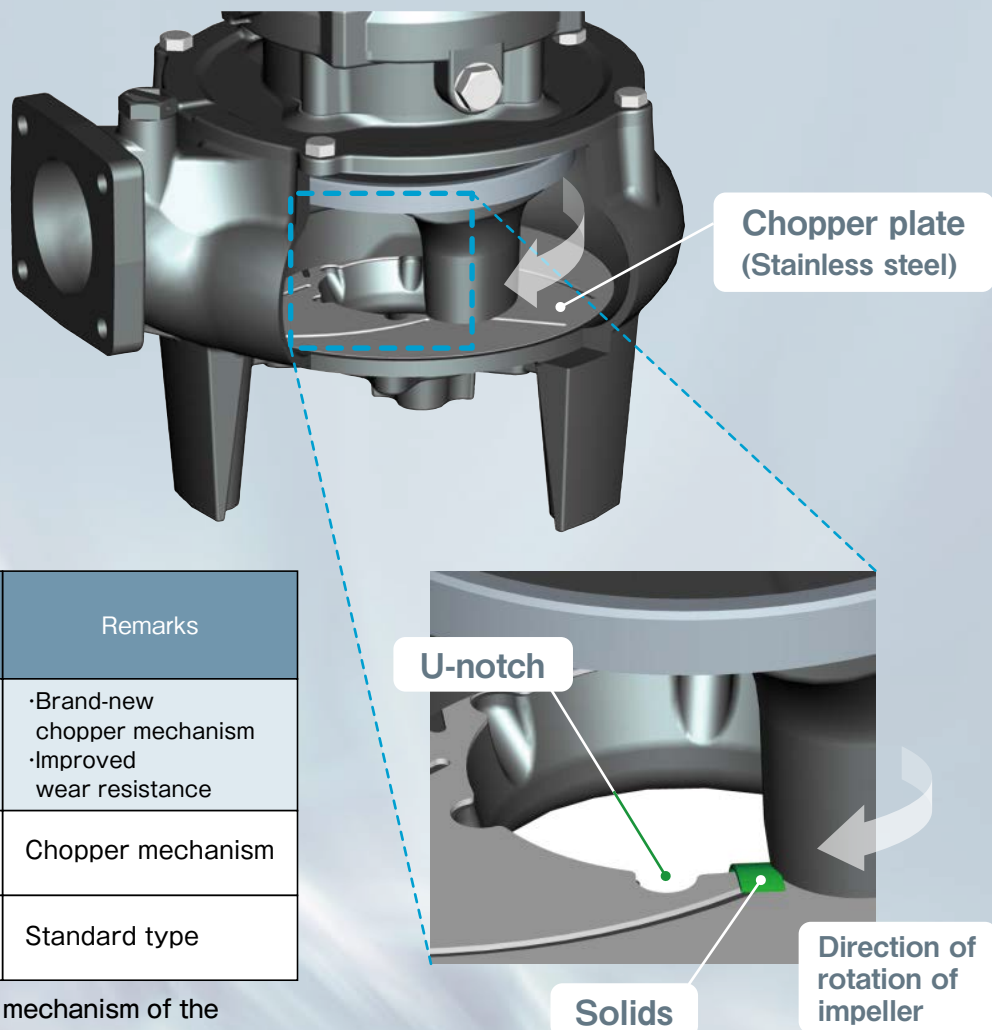


Pump model	Pass-through test	Remarks
CNMJ-MT	★★★★	- Brand-new chopper mechanism - Improved wear resistance
CJ	★★★	Chopper mechanism
CN	★	Standard type

The brand-new chopper mechanism of the CNMJ-MT overcomes the weak pass-through capability of a semi-open impeller.

Improved Performance

In comparison with our vortex-type 80mm passable model CVM80, this new product may also cut down on power consumption while providing similar performance.


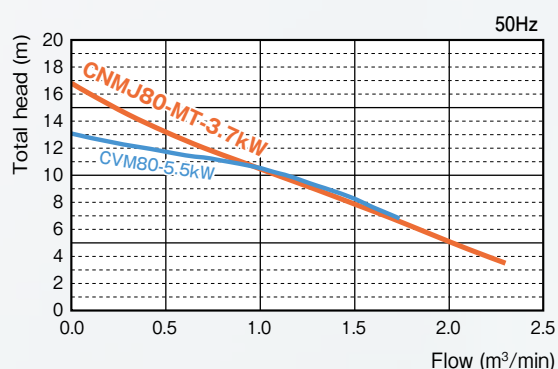


Quick, Easy Maintenance

The pull-out design allows for easier and more efficient inspection and parts replacement. The pump unit can be detached without removing the impeller from the motor shaft.



Performance Curves

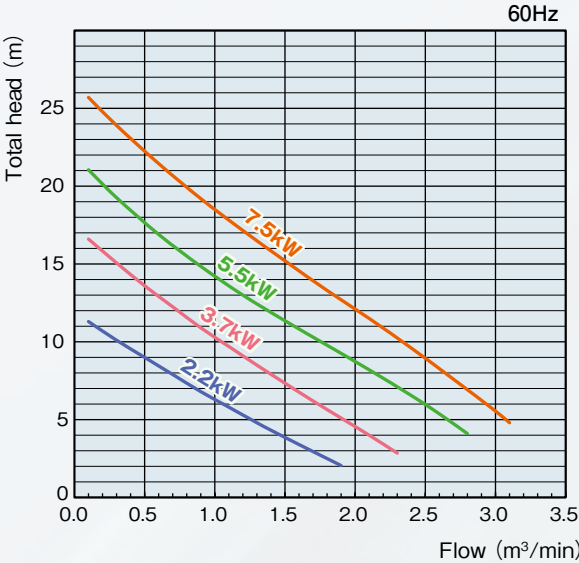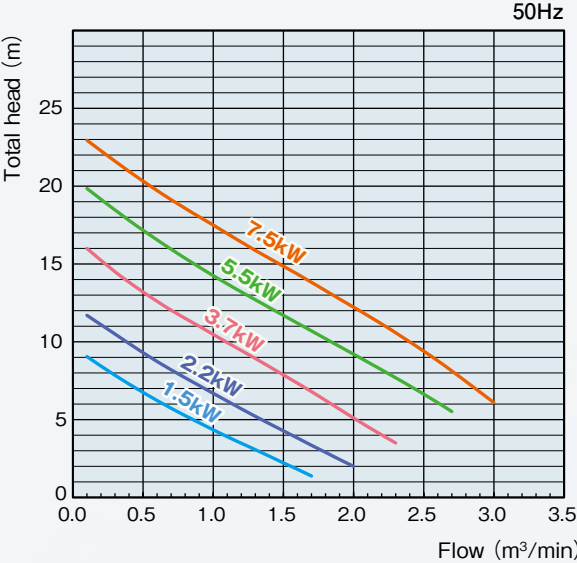

Standard Specifications

Liquid handled	Kind of liquid	Wastewater and sewage
	Temperature	0~40℃
Material	Cable	PVC insulated PVC sheathed cable
	Motor shaft	420J2 stainless steel
	Pump housing	Gray iron casting (FC250)
	Impeller	Gray iron casting (FC250)
Electric motor	Type	Air-filled submersible induction motor
	Insulation class	Class F
	Enclosure	IP68
	Phase	3
	No. of poles	4
	Frequency	50/60Hz
	Rated voltage	380V/400V/415V (50Hz) 380V/400V/440V (60Hz)

Cable Specifications

Model		Cable size				
		Type	Section area (mm ²)	Cores	Outer dia. (mm)	Length (m)
CNMJ80-MT	1.5 kW	PVC insulated PVC sheathed cable	1.25	4	11.5	8
	2.2 kW					
	3.7 kW		2.0		12	
CNMJ100-MT	5.5 kW					
	7.5 kW					

*Cable extension (option): 10-30m (every 5m)


Standard Specifications

Discharge (mm)	Pump model	Installation kit No.		Rated output (kW)	Solid size (mm)	Flow — Total head (m³/min-m)		Pump weight (kg)
		Guide rail installation	Free standing			50Hz	60Hz	
80	CNMJ80-MT	P80B	F80	1.5	80	0.8 — 5.2	—	65
				2.2		0.9 — 7.1	0.9 — 6.8	72
				3.7		1.1 — 9.9	1.1 — 9.6	84
	CNMJ100-MT			5.5		1.5 — 11.6	1.5 — 11.3	108
				7.5		1.7 — 13.7	1.7 — 13.9	119
100	CNMJ80-MT	P100B	F100	1.5		0.8 — 5.2	—	65
				2.2		0.9 — 7.1	0.9 — 6.8	72
				3.7		1.1 — 9.9	1.1 — 9.6	84
	CNMJ100-MT			5.5		1.5 — 11.6	1.5 — 11.3	108
				7.5		1.7 — 13.7	1.7 — 13.9	119

Features and Construction


Cable entry with core wire seal

The core wire seal prevents water from penetrating into the motor through the core wire.




Motor protector

A thermal protector (built-in automatic reset type motor protector) or thermal switches are embedded in the motor winding.




Shaft seal

A highly wear resistant double mechanical seal combined with the use of an oil seal further extends working life. (not available on all models)



Air-filled submersible motor

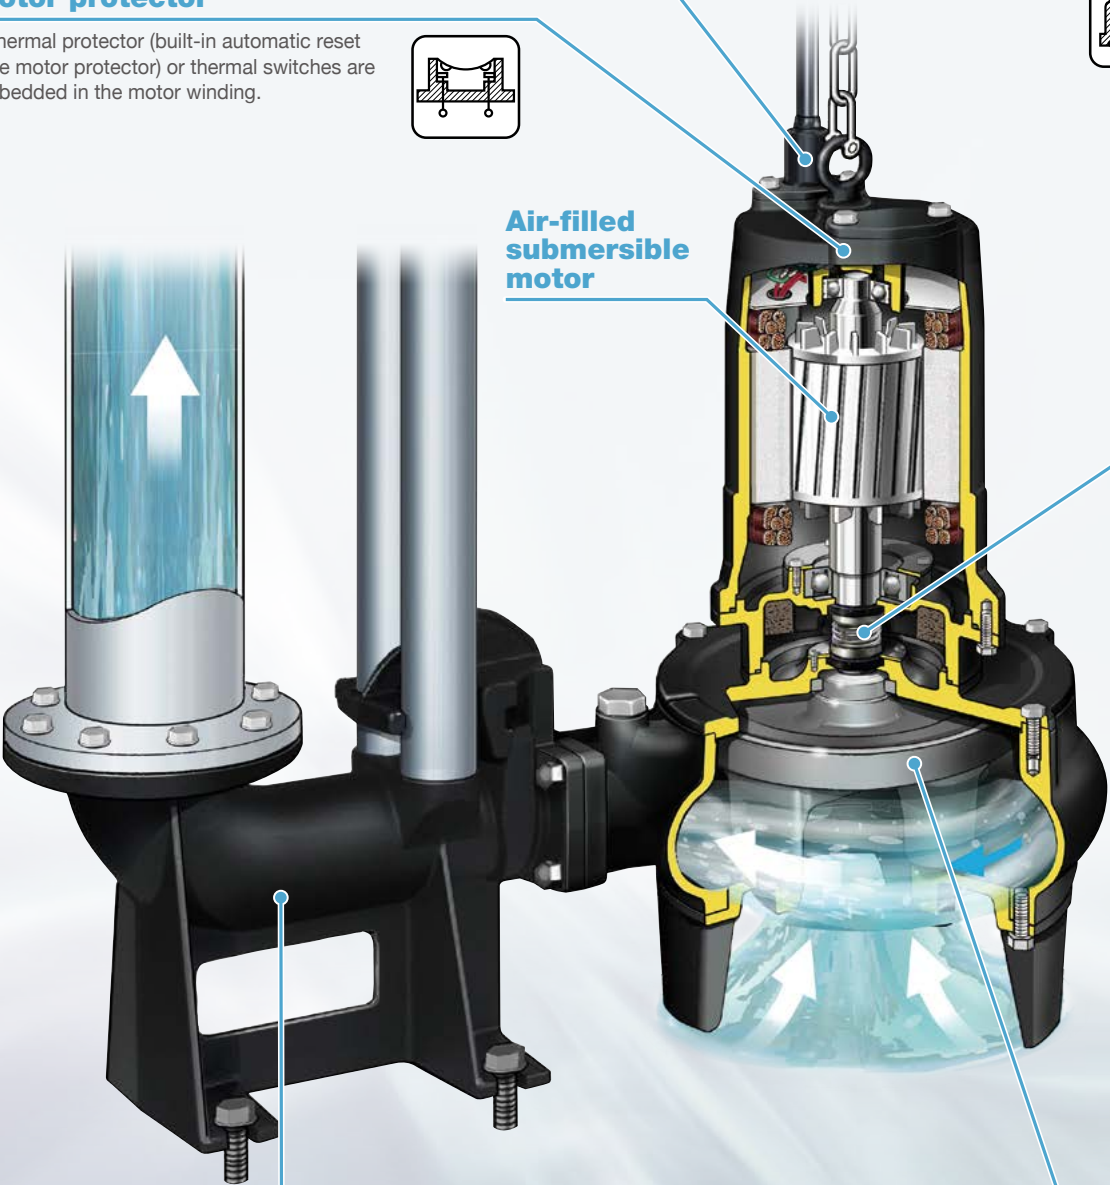

Discharge connection

The pump is automatically connected to the discharge pipe.

Impeller

Single-vane, semi-open channel impeller with helix formed passage realizes excellent pass-through capability. All impellers are subject to the dynamic and static balance adjustment at factory.

Applications

■ Sewage treatment plant & Onsite wastewater treatment system

Handling of raw water and other treatment processes

■ Pump station

Collection of sewage, wastewater or stormwater

■ Building & Shopping complex

Drainage of sanitary and kitchen wastewater


■ Road, Underpass & Subway

Drainage of stormwater

■ Factory & other facilities


Handling of industrial wastewater, etc.

Sectional View (CNMJ80-MT, CNMJ100-MT)

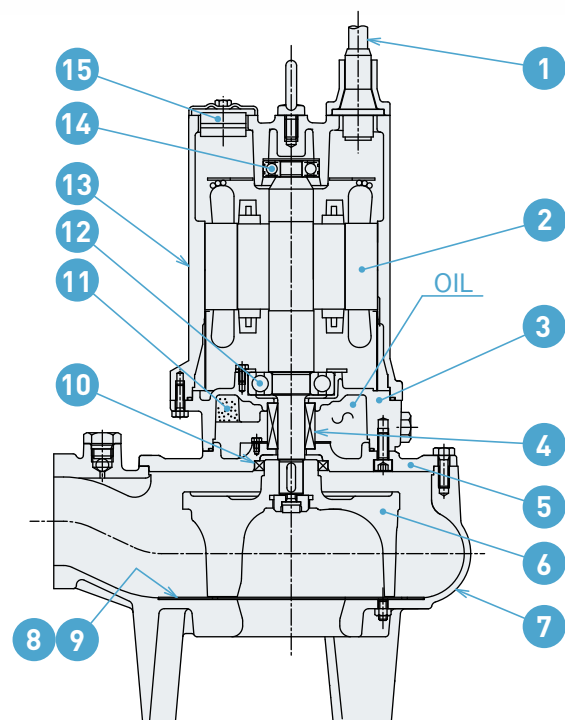


No.	Name	Material
1	Cable	PVC insulated PVC sheathed cable
2	Motor	Shaft: 420J2 stainless steel
3	Oil housing	Gray iron casting (FC250)
4	Mechanical seal	Upper SiC/SiC Lower SiC/SiC
5	Mechanical seal bracket	Gray iron casting (FC250)
6	Impeller	Gray iron casting (FC250)
7	Pump housing	Gray iron casting (FC250)
8	Chopper plate	304 stainless steel
9	Shim	Polyethylene (PE)
10	Oil seal	Acrylonitrile butadiene rubber (NBR)
11	Pressure equalizer (Not on 1.5 kW pumps)	Foamed acrylonitrile butadiene rubber
12	Ball bearing (lower)	—
13	Stator housing	Gray iron casting (FC250)
14	Ball bearing (upper)	—
15	Thermal protector	—

Dimensions (unit:mm)

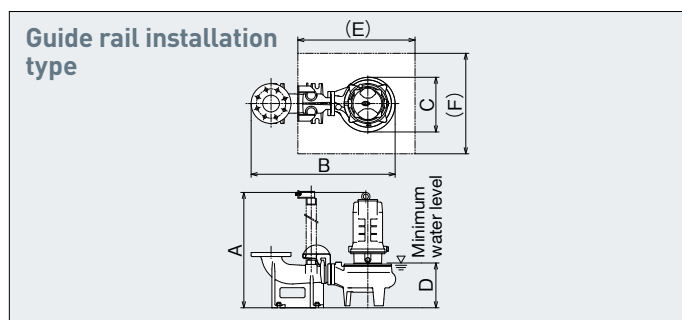

Pump model	Installation kit No.	Rated output (kW)	A	B	C	D	E	F
CNMJ80-MT	P80B	1.5	619	847	327	270	700	500
	P100B			860				600
	P80B	2.2	631	847				500
	P100B			860				600
	P80B	3.7	692	847				500
	P100B			860				600
CNMJ100-MT	P80B	5.5	724	926	394	275		600
	P100B			939				
	P80B	7.5	769	926				
	P100B			939				

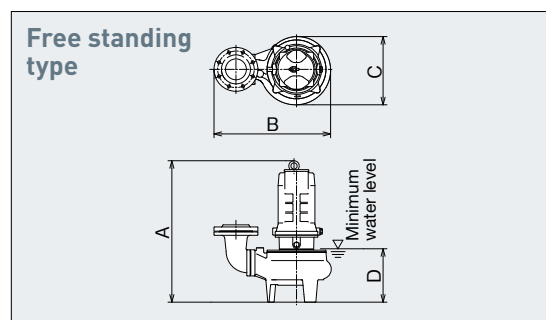

Pump model	Installation kit No.	Rated output (kW)	A	B	C	D
CNMJ80-MT	F80	1.5	607	541	327	260
	F100			558		
	F80	2.2	619	541		
	F100			558		
	F80	3.7	680	541		
	F100			558		
CNMJ100-MT	F80	5.5	712	619	394	265
	F100			637		
	F80	7.5	757	619		
	F100			637		

Specifications and dimensions are subject to change without notice.

ShinMaywa Industries, Ltd.

Global Sales Dept. 3-2-43, Shitte, Tsurumi-ku, Yokohama, 230-0003, Japan
 Sales & Marketing Dept., Fluid Div. Phone : +81-45-584-1322 Fax : +81-45-575-2286
 E-mail : global.pump@shinmaywa.co.jp

ShinMaywa (Asia) Pte. Ltd.

15 Tuas South Street 8, Singapore 637109
 Phone : +65-6224-0728
 Fax : +65-6224-9678
 E-mail : asia.ad@shinmaywa.com.sg

Thai ShinMaywa Co., Ltd.

199 Moo 12, Soi Petchakasem 120, Petchakasem Road,
 Om-noi, Krathumban, Samutsakorn 74130 Thailand
 Phone : +66-2-420-4712
 Fax : +66-2-420-9863
 E-mail : tsmc.fluid.sales@shinmaywa.co.jp

ShinMaywa (Shanghai) Trading Co., Ltd.

201107 Building 6, Youleji City, Industrial Park, 333 Lane,
 Zhujian Road Minhang, Shanghai, China
 Phone : +86-21-5296-2966
 Fax : +86-21-5296-2970
 E-mail : shanghai@shinmaywa.co.jp

ShinMaywa (America), Ltd.

Headquarters
 10737 Gateway West, Suite 240,
 El Paso, Texas 79935, U.S.A.
 Phone : +1-915-594-9862
 Fax : +1-915-594-9866
 E-mail : info@shinmaywaamerica.com

North Carolina Branch
 6135 Park South Drive, Suite 510
 Charlotte, NC, 28210, U.S.A.
 Phone : +1-704-945-7112
 Fax : +1-704-945-7101
 E-mail : pump@shinmaywaamerica.com

URL : <https://www.shinmaywa.co.jp/america/index.html>

<https://www.shinmaywa.co.jp/pump/english/index.html>



Website

ShinMaywa ONO PLANT
 ISO 9001-0066539/ISO 14001-0066652