THE-STRONG, SILENT, TYPE-






INTRODUCING DAVEY'S ALL NEW, SUPER-QUIET POOL PUMP

DEPEND ON

DAVEY

WATER PRODUCTS

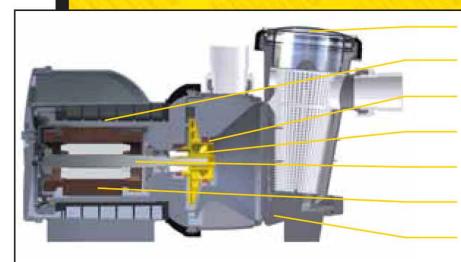

Easy to remove, lens shaped leaf basket cover for easy viewing and removal of leaves.

Rubber noise dampening layer for vibration absorption and super-quiet operation.

Patented 'Floating Neckring' seal protection system for long life and high efficiency.

Patented clamped impeller for superior air handling and priming.

Stainless steel shaft and motor shell for corrosion resistance in salt water pools.

High efficiency water cooled motor for super quiet operation.

Corrosion and UV resistant materials of construction for a long reliable life.

ELECTRICAL DATA							
Model No.	SLS 100	SLS 150	SLS 200	SLS 300			
Voltage (V)		220-250					
Supply Frequency		50Hz					
Start Current (A)	18	18	18	20			
Run Current (A)	3.6	4.0	4.9	5.9			
Motor Input Power (W)	740	860	1090	1400			
Motor Output Power (W)	525	620	775	960			
RPM	2850						
Enclosure Class (IP)	56						
Insulation Class	F:						
Approval No.	V06258						


OPERATING LIMITS							
Model No.	SLS 100	SLS 150	SLS 200	SLS 300			
Water Temperature	Max 50°C						
Ambient Temperature	Max 55°C						
dBa @ 1 metre	56	55	54	54			

MODEL NUMBER	IDENTIFICATION
SLS	300
SLS = Silensor Small (PACR Replacement)	300 = 300lpm in a typical installation.

The second secon				
MODEL	Mounting Holes Dia.	Inlet P.V.C. (mm)	Outlet P.V.C. (mm)	Net Weight (kg)
SLS 100		40/50	40/50	11.0
SLS 150	10mm x	40/50	40/50	11.0
SLS 200	34mm deep	40/50	40/50	11.5
SLS 300		40/50	40/50	11.5

All dimensions in mm unless otherwise stated.

HYDRAULIC PERFORMANCE TOTAL HEAD (m) 20 15 10 5 SLS100 SLS150 SLS200 SLS300 500 250 300 FLOW (Ipm)



DEPEND ON DAY DY

All details in this leaflet are accurate at time of printing. This literature is not a complete guide to product usage. Further information is available from your Davey dealer, Davey Customer Service Centre and from the relevant product Installation & Operating Instructions. This datasheet must be read in conjunction with the relevant product Installation & Operating Instructions and all applicable statutory requirements. Product specifications may change without notice.

® Davey and Silensor are registered trademarks of Davey Water Products Pty Ltd. © Davey Water Products Pty Ltd 2006.

WATER PRODUCTS

Davey Water Products Pty Ltd Member of the GUD Group ABN 18 066 327 517 Head Office and Manufacturing

6 Lakeview Drive, Scoresby, Australia 3179 Ph: +61 3 9730 9121 E-mail: export@davey.com.au

Kantstrasse 53.

Kattisuasse 35, 04275 Leipzig Ph: +49 341 301 0412 F-mail· akrenz@daveveurope.com